



Compañía Internacional de Telecomunicaciones

ANTENA LOGARÍTMICA
806 ~ 960 MHz / 1710 ~ 2500 MHz

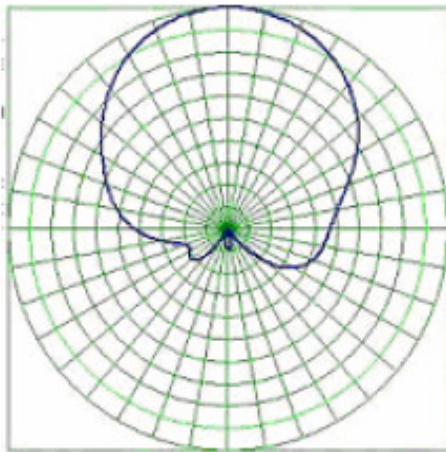

Horizontal

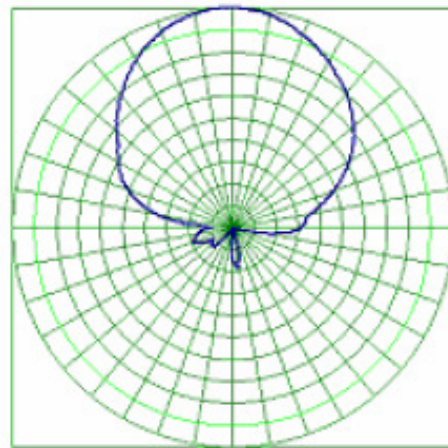


Vertical

Claudio Arrau 0349, Providencia Santiago de Chile

Fono: 6651475 Fax: 6356472

www.citltda.cl



Compañía Internacional de Telecomunicaciones

SPECIFICATIONS	
FREQUENCY RANGE	806~960 / 1710 ~ 2500
POLARIZATION	VERTICAL / HORIZON
GAIN (dbi)	10dbi
HALF POWER BEAM WIDTH °	HORIZONTAL 60
HALF POWER BEAM WIDTH °	VERTICAL 60
F/B RATIO-DB	>=25
VSWR	<=1.5
POWER CAPACITY (W)	100
IMPEDANCE Ω	50
CONNECTOR	N
FIXATION MODE	POLE-EMBRACING / WALL MOUNT
DIMENSIONS (MM)	33*21.5*6.5
WEIGHT (KG)	1.0
WOWK TEMPERATURE °C	-40 - +70

Claudio Arrau 0349, Providencia Santiago de Chile

Fono: 6651475 Fax: 6356472

www.citltda.cl