


Protector de Linea

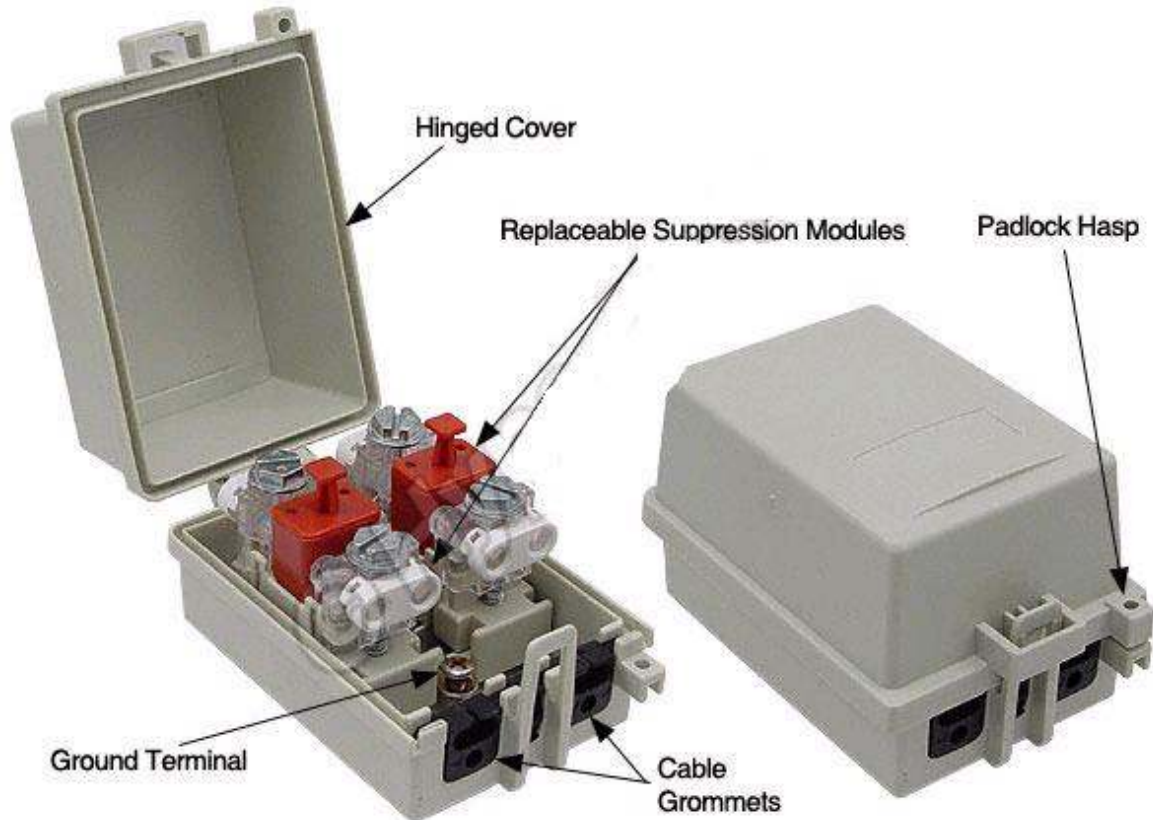

- Applications:**
- Phone, DSL, ISDN
 - RS-422/RS-485
 - T1/E1/J1
 - 10/100 Base-T
 - IP, Network, or Web Camera (AL-D2VW-9)
 - VoIP Telephone (AL-D2VW-9)

- Features:**
- Protects up to two phone lines or data lines
 - Impact and weather resistant
 - Locking hinged cover
 - Self sealing terminals
 - Easy installation, no wire stripping required
 - Available with 230V or 90V suppression modules
 - Field Replaceable suppression modules
 - Fail safe design
 - Ground terminal provided
 - Replacement Suppression modules available
 - RoHS Compliant

Electrical Specifications

Connectors	Self Sealing Screw Terminals
Clamping Voltage	+ or - 90 volts

Mechanical Specifications

Enclosure Material	Polycarbonate
Enclosure Color	Gray
Wire Gauge	26AWG (0.4mm) to 17AWG (1.2mm)
Overall insulation dia. of drop wire	0.2" (5mm) Dia. Maximum
Grounding	M4-0.7 Screw Terminal
Operating Temperature	-40 C (-40 F) to +80 C (+176 F)
Weight	.3 lbs. (.14 kg)
Dimensions (WxHxAOL)	2.52 x 2.39 x 4 (inches) 64 x 60.7 x 101.6 (mm)
RoHS Compliant	Yes

