



CIT LTDA

COMPAÑÍA INTERNACIONAL DE TELECOMUNICACIONES

TELECOMUNICACIONES  
ELECTRÓNICA - TELEFONÍA – COMPUTACIÓN  
RUT N° 78.856.630 - 1


## Antena MIMO 2,4GHz de 15 dBi.

### Electrical Specifications


Frequency Range	2400-2500MHz
Polarization	H+V
Gain	15 dBi
VSWR	≤1.5
Horizontal Beamwidth	360°
Vertical Beamwidth	8°
Port-to-port Isolation	≧ 30dB
Nominal Impedance	50Ω
Maximum Power	100W
Lightning Protection	DC Ground

### Mechanical Specifications

Connector	2xN-Female
Mounting Type	Mast Mount
Mounting Mast Size	Φ38-60mm
Dimensions	Ø76×1250 mm
Weight	3.5 KG
Max. Wind Velocity	210km/h
Operating Temperature	-40°C to +65 °C

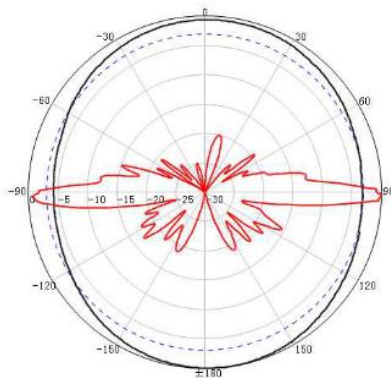

H-Pol @ 2450MHz

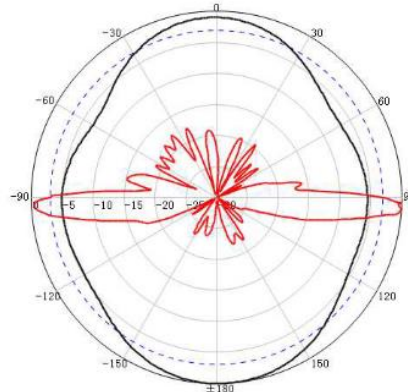

V-Pol @ 2450MHz